


RPM Series 引线式导电聚合物固体铝电解电容器 135℃ 4000 小时产品 Conductive Polymer . 135℃ 4000 hours . Radial Lead Type

- 耐高电压 High voltage
- 高频低阻抗 Low ESR at high frequency range
- 高纹波 High ripple current capability
- 135℃,4000 小时 135℃,4000 hours assured

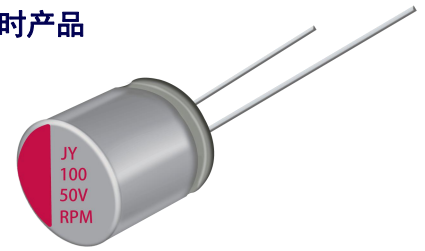


■ 主要技术性能 Specifications

项目 Items	主要特性 Performance Characteristics								
使用温度范围 Operating Temperature Range	-55~+135℃								
额定电压范围 Rated Voltage Range	16~80V. DC								
标称电容量允许偏差 Capacitance Tolerance	±20% (120Hz, 20℃)								
漏电流(20℃) Leakage Current	施加额定工作电压 2 分钟, I≤0.2 CV(μA) After 2 minutes' application of rated voltage, the leakage current is not more than 0.2 CV								
损耗角正切值(120Hz 20℃) Dissipation Factor	测试频率 120Hz/温度 20℃, 损耗小于规范值 Less than the specified value at 120Hz, 20℃								
等效串联电阻 Equivalent Series Resistance	测试频率 100KHz/温度 20℃, 等效串联电阻小于规范值 Less than the specified value at 100KHz, 20℃								
耐久性 Load Life(135℃, 4000hrs)	<p>在 135℃环境施加额定工作电压 4000 小时后,电容器的特性符合下表要求。 135 ℃ environment d rated operating voltage4,000 hours, capacitor characteristics meet the requirements in the following table.</p> <table border="1"> <tr> <td>电容量变化率 Capacitance Change</td> <td>初始值的±20%以内 Within ±20% of the initial value</td> </tr> <tr> <td>漏电流值 Leakage</td> <td>≤规范值 Less than the specified value</td> </tr> <tr> <td>损耗角正切值 Dissipation Factor</td> <td>≤规范值的 150% Less than 150% of the specified value</td> </tr> <tr> <td>等效串联电阻 Equivalent Series Resistance</td> <td>≤规范值的 200% Less than 200% of the specified value</td> </tr> </table>	电容量变化率 Capacitance Change	初始值的±20%以内 Within ±20% of the initial value	漏电流值 Leakage	≤规范值 Less than the specified value	损耗角正切值 Dissipation Factor	≤规范值的 150% Less than 150% of the specified value	等效串联电阻 Equivalent Series Resistance	≤规范值的 200% Less than 200% of the specified value
电容量变化率 Capacitance Change	初始值的±20%以内 Within ±20% of the initial value								
漏电流值 Leakage	≤规范值 Less than the specified value								
损耗角正切值 Dissipation Factor	≤规范值的 150% Less than 150% of the specified value								
等效串联电阻 Equivalent Series Resistance	≤规范值的 200% Less than 200% of the specified value								
高温贮存 Shelf Life (105℃, 1000hrs)	<p>在 135℃环境放置 1000 小时后,电容器的特性符合下表要求。 After storage 1000 hours' at +135℃ and then resumed 16 hours, the characteristics requirements listed .</p> <table border="1"> <tr> <td>电容量变化率 Capacitance Change</td> <td>初始值的±20%以内 Within ±20% of the initial value</td> </tr> <tr> <td>漏电流值 Leakage</td> <td>≤规范值 Less than the specified value</td> </tr> <tr> <td>损耗角正切值 Dissipation Factor</td> <td>≤规范值的 150% Less than 150% of the specified value</td> </tr> <tr> <td>等效串联电阻 Equivalent Series Resistance</td> <td>≤规范值的 200% Less than 200% of the specified value</td> </tr> </table>	电容量变化率 Capacitance Change	初始值的±20%以内 Within ±20% of the initial value	漏电流值 Leakage	≤规范值 Less than the specified value	损耗角正切值 Dissipation Factor	≤规范值的 150% Less than 150% of the specified value	等效串联电阻 Equivalent Series Resistance	≤规范值的 200% Less than 200% of the specified value
电容量变化率 Capacitance Change	初始值的±20%以内 Within ±20% of the initial value								
漏电流值 Leakage	≤规范值 Less than the specified value								
损耗角正切值 Dissipation Factor	≤规范值的 150% Less than 150% of the specified value								
等效串联电阻 Equivalent Series Resistance	≤规范值的 200% Less than 200% of the specified value								

RPM Series

外形图及尺寸 Case size table

mm

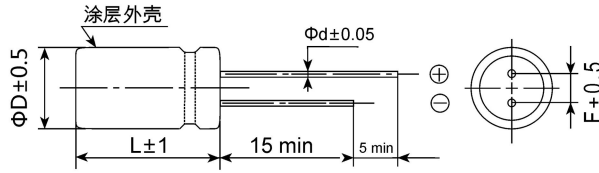

$\Phi D \times L$	ΦD	L	F	Φd
6.3×5	6.3	5	2.5	0.5
6.3×8	6.3	8	2.5	0.5/0.6
8×8	8	8	3.5	0.6
8×12	8	12	3.5	0.6
10×10	10	10	5.0	0.6
10×12	10	12	5.0	0.6

编码和规格 Part number & Specifications

额定电压 Rated Voltage (V)	标称容量 Capacitance (μF)	产品编码 Part Number	等效串联电阻 ESR(m Ω max) 100Khz to 300Khz	耐纹波电流 (mA rms/ 105 $^{\circ}C$, 100Khz)	损耗 Tan δ (120Hz)	漏电流 (max) (μA)	尺寸 $\Phi D \times L$ (mm)
16	120	RPM1C121M0606	36	900	0.12	384	6.3×5
	220	RPM1C221M0608	23	1500	0.12	704	6.3×8
	220	RPM1C221M0808	30	1100	0.12	704	8×8
	470	RPM1C471M0810	17	2400	0.12	1504	8×10
	470	RPM1C471M1010	22	1900	0.12	1504	10×10
	560	RPM1C561M0812	16	2700	0.12	1792	8×12
	680	RPM1C681M1010	19	2300	0.12	2716	10×10
	1000	RPM1C102M1012	13	2500	0.12	3200	10×12
20	100	RPM1D101M0606	41	900	0.12	400	6.3×5
	150	RPM1D151M0608	25	1200	0.12	750	6.3×8
	150	RPM1D151M0808	39	800	0.12	750	8×8
	330	RPM1D331M0810	19	2300	0.12	1320	8×10
	330	RPM1D331M1010	23	1800	0.12	1320	10×10
	470	RPM1D471M0812	18	2500	0.12	1880	8×12
	560	RPM1D561M1010	20	2200	0.12	2240	10×10
	680	RPM1D681M1012	14	3000	0.12	2720	10×12
25	56	RPM1E560M0606	43	900	0.12	280	6.3×5
	100	RPM1E101M0608	27	1100	0.12	500	6.3×8
	100	RPM1E101M0808	41	800	0.12	500	8×8
	220	RPM1E221M0810	20	2300	0.12	1100	8×10
	220	RPM1E221M1010	24	1800	0.12	1100	10×10
	270	RPM1E271M0812	19	2300	0.12	1350	8×12
	330	RPM1E331M1010	20	2200	0.12	1650	10×10
	470	RPM1E471M1012	15	2900	0.12	2350	10×12
35	47	RPM1V470M0605	48	800	0.12	329	6.3×5
	68	RPM1V680M0608	31	1100	0.12	476	6.3×8
	68	RPM1V680M0808	44	800	0.12	476	8×8
	150	RPM1V151M0810	22	2200	0.12	1050	8×10
	150	RPM1V151M1010	25	1800	0.12	1050	10×10
	220	RPM1V221M0812	21	2300	0.12	1540	8×12
	270	RPM1V271M1010	20	2200	0.12	2310	10×10
	330	RPM1V331M1012	16	2800	0.12	3290	10×12

RPM Series

■ 编码和规格 Part number & Specifications

额定电压 Rated Voltage (V)	标称容量 Capacitance (μ F)	产品编码 Part Number	等效串联电阻 ESR(m Ω max) 100Khz to 300Khz	耐纹波电流 (mA rms/ 105 $^{\circ}$ C, 100Khz)	损耗 Tan δ (120Hz)	漏电流 (max) (μ A)	尺寸 Φ D \times L (mm)
50	22	RPM1H220M0606	50	700	0.12	220	6.3 \times 5
	39	RPM1H390M0608	36	900	0.12	390	6.3 \times 8
	39	RPM1H390M0808	45	900	0.12	390	8 \times 8
	82	RPM1H820M0810	26	2100	0.12	820	8 \times 10
	82	RPM1H820M1010	34	1600	0.12	820	10 \times 10
	120	RPM1H121M0812	25	2100	0.12	1200	8 \times 12
	120	RPM1H121M1010	25	2100	0.12	1200	10 \times 10
63	180	RPM1H181M1012	19	2500	0.12	1800	10 \times 12
	12	RPM1J120M0606	51	700	0.12	151	6.3 \times 5
	22	RPM1J220M0608	45	800	0.12	277	6.3 \times 8
	22	RPM1J220M0808	48	800	0.12	277	8 \times 8
	39	RPM1J390M0810	28	1900	0.12	491	8 \times 10
	47	RPM1J470M1010	35	1500	0.12	592	10 \times 10
	56	RPM1J560M0812	27	2100	0.12	705	8 \times 12
	68	RPM1J680M1010	28	2000	0.12	857	10 \times 10
80	100	RPM1J101M1012	24	2100	0.12	1260	10 \times 12
	12	RPM1K120M0608	50	800	0.12	192	6.3 \times 8
	27	RPM1K270M0810	38	1000	0.12	432	8 \times 10
	39	RPM1K390M0812	35	1100	0.12	624	8 \times 12
	47	RPM1K470M1010	33	1200	0.12	752	10 \times 10
	68	RPM1K680M1012	28	1500	0.12	1088	10 \times 12

■ 纹波电流频率补偿系数 Frequency coefficient of allowable ripple current

Frequency 频率	120Hz \leq f<1KHz	1KHz \leq f<10KHz	10KHz \leq f<100KHz	100kHz \leq f<500KHz
Coefficient 系数	0.05	0.30	0.70	1.00